

CE M



CAPACITY	kg	DIVISION	(g)	NET WEIGHT	(kg)	CODE
6		e=0.1		4		BIL6
15		e=0.2		4		BIL15
30		e=0.5		4		BIL30

CE-M APPROVED - LEGAL FOR TRADE USE VERSION

3/6	e=1/2	4	VERIBIL6
6/15	e=2/5	4	VERIBIL15
15/30	e=5/10	4	VERIBIL30

DESCRIPTION

- Stainless steel loading plate.
- RS232 output for connection to PC or external printer.
- 6-digit backlit LCD display (24 mm height).
- 7-key waterproof keyboard.
- Bubble level and adjustable feet.
- 6 V rechargeable internal battery, 4 Ah capacity.
- Operating time: 70 hours.
- Power supply included.

MAIN FUNCTIONS


- Piece counting with sequence display of: number of pieces, average unit weight, total weight of the pieces on the scale.
- Automatic/manual totalization of the weighings.
- Weight indication as a percentage.
- Weight/pieces/percentage checking (HIGH/LOW) with acoustic and visual alarm.
- Auto power-off.
- Receipt printing via STAVT II external printer: customizable header, date, time, net weight, average unit weight, number of pieces on the scale, total weight, total number of pieces.

CERTIFICATIONS

CERTIFICATIONS ON REQUEST

	CODE
✓ Calibration report - ACCREDIA LAT traceability	TARATURA50

DIMENSIONS (mm)

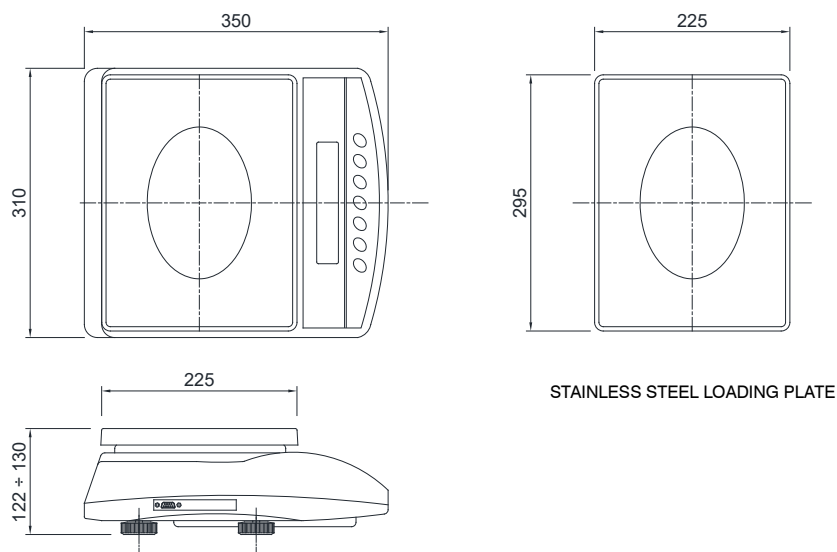

TECHNICAL FEATURES

Power supply	230 VAC $\pm 10\%$
Internal battery	6 V, 4 Ah capacity
Linearity	$< 0.01\%$ full scale
Display resolution	60000
Units of measure	g, kg
Serial port	RS232
Baud rate	2400, 4800, 9600, 19200 (bit/s)
Humidity (condensate free)	$< 85\%$
Storage temperature	$-10\text{ }^{\circ}\text{C}$ $+50\text{ }^{\circ}\text{C}$
Working temperature	$-10\text{ }^{\circ}\text{C}$ $+40\text{ }^{\circ}\text{C}$

OPTIONS ON REQUEST

DESCRIPTION	CODE
 Stainless steel deep tray. Dimensions: 230x300x40 mm.	PIATTOBAC
 Panasonic rechargeable battery mod. LC-R064R5P - 6 V, 4.5 Ah capacity.	BATTERIA6V4AH
 Desktop thermal printer.	STAVTII

The Company reserves the right to make changes to the technical data, drawings and images without notice.